

Cloud Core Router

CCR1016-12G




CCR1016 is an industrial grade super fast router with cutting edge 16 core CPU. If you need many millions of packets per second - Cloud Core Router is your best choice.

The device is available with a 1U rackmount case (CCR1016-12G) or without the case as a board unit (CCR1016-12G-BU), has twelve Gigabit ethernet ports, a serial console cable and a USB port.

The CCR1016-12G has two SODIMM slots, by default it is shipped with 2GB of RAM, but has no memory limit in RouterOS (will accept and utilize 16GB or more).

- 16 core networking CPU, 1.2GHz clock per core
- 12 Mbytes total on-chip cache
- State of the art TILE GX architecture
- 12x Gigabit ports, all directly connected to CPU
- 1U rackmount case option
- Color touchscreen LCD display
- Up to 1.5 mpps throughput in regular mode
- Up to 17.8 mpps throughput in fastpath mode (wire speed)
- Up to 12 Gbps throughput with common RouterOS configurations

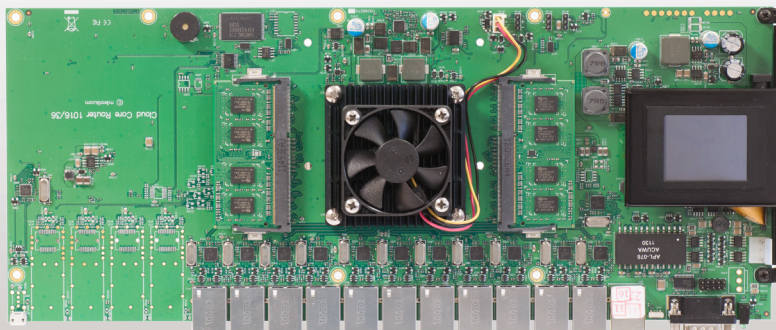

CCR1016-12G-BU

CPU	Tilera Tile-Gx16 CPU (16-cores, 1.2Ghz per core)
Memory	Two SODIMM DDR3 slots, 2x 1GB installed (no hw or software max limit)
Ethernet	Twelve 10/100/1000 Mbit/s Gigabit Ethernet with Auto-MDI/X
Expansion	microUSB port, host and device mode
Storage	512MB Onboard NAND
Serial port	One DB9 RS232C asynchronous serial port
Extras	Reset switch; beeper; voltage, current and temperature monitoring; speed controlled fan
Power options	IEC C14 standard connector 110/220V, Power jack (BU model only) and Passive PoE 24V. PSU included in both models.
Board dimensions	355x145mm55mm
Temperature	Max ambient temperature 50° @ 1.2GHz; 70° @ 1GHz CPU core frequency
OS	MikroTik RouterOS v6 (64bit), Level 6 license
Included	CCR1016-12G: router in a 1U case with LCD, PSU, power cable, usb cable CCR1016-12G-BU: router, PSU, power cable, mounted LCD screen, usb cable